

4S & 4M-Series Sub-Miniature & Miniature Slide Switches



4S1-Series Sub-Miniature Slide Switches

4M1-Series

Miniature Slide Switch

Specifications


Contact Rating refer to ordering scheme Electrical Life
Contact Resistance 10 mΩ max. initial @ 2-4 VDC 100mA for both silver & gold plated contacts.
Insulation Resistance 1000 MΩ min.
Dielectric Strength 1500 Volts RMS @ sea level
Operating Temperature30°C to +85°C
Solder Heat Resistance MIL-STD-202, Method 210
Actuator Travel
Materials
Case Uially phthalate (DAP) (UL 94V-0)
Slide HandleNylon
HousingStainless Steel
Terminal Seal Epoxy

4S1-Series Ordering Scheme






4M1-Series Ordering Scheme

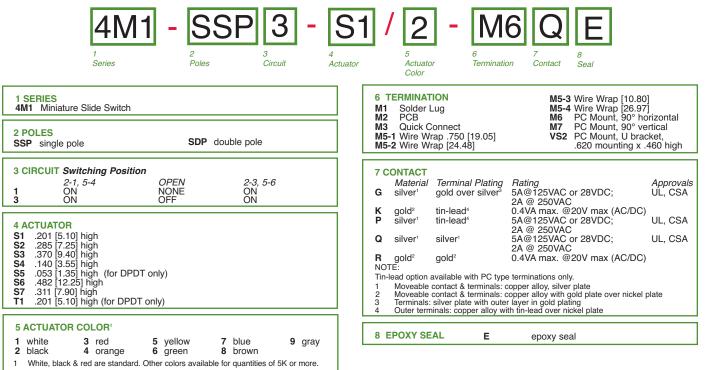


4S-Series Dimensional Specifications: in. [mm]

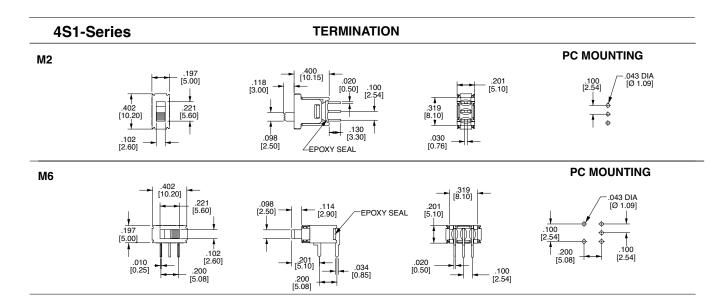



4M1-Series Dimensional Specifications: in. [mm]

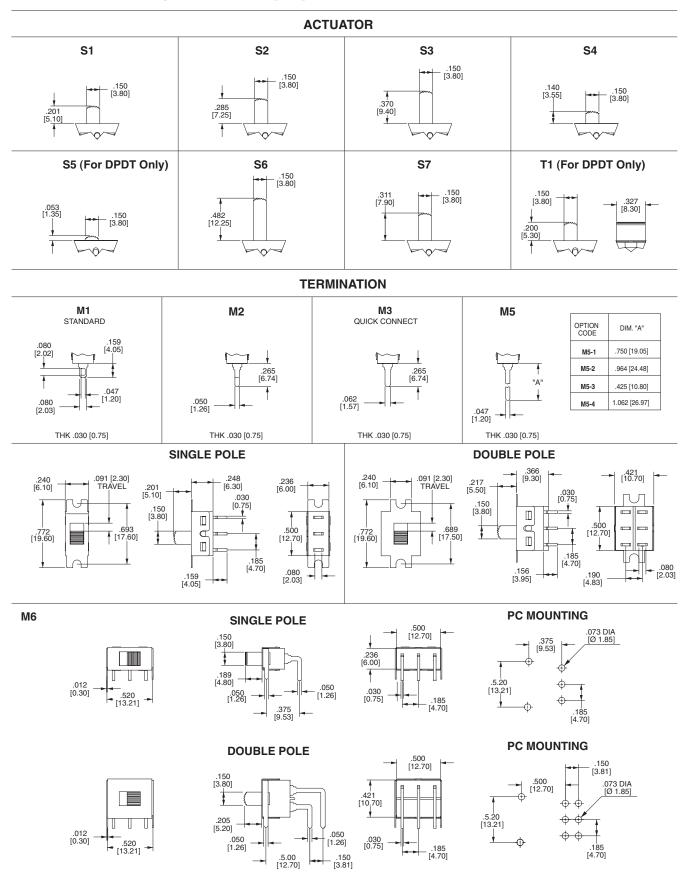

www.carlingtech.com



4M1-Series Dimensional Specifications: in. [mm]

