W-Series Switch

Carling Technologies set the standard for performance and aesthetics with the widely successful, often imitated but never duplicated, V-Series rocker switches. Building further upon that platform, Carling has once again raised the bar with the fully sealed W-Series. The W-Series' traditional appearance features complete IP68 protection, including below the panel, where the critical connection is made from wiring harness. When used in conjunction with the integrated connector, the totally submersible W-Series provides a seal for up to ten individual wires, assuring compatibility with even the most complex circuitry.

The W-Series also offers a wide variety of accoutrements including endless illumination options featuring dual level and multicolor LEDs, progressive and hazard warning circuits, ratings up to 10A 24V, choice of paddle, rocker, locking or laser etched actuators, hundreds of standard legend choices and the electrical performance and reliability that is the hallmark of Carling Technologies products.



Key Features:


- Fully sealed and submersible
- IP68 protection including below the panel
- Tri-seal design
- Connector with twin locking tabs

Typical Applications:

- Marine equipment
- Transportation equipment



W-Series Switch DESIGN FEATURES

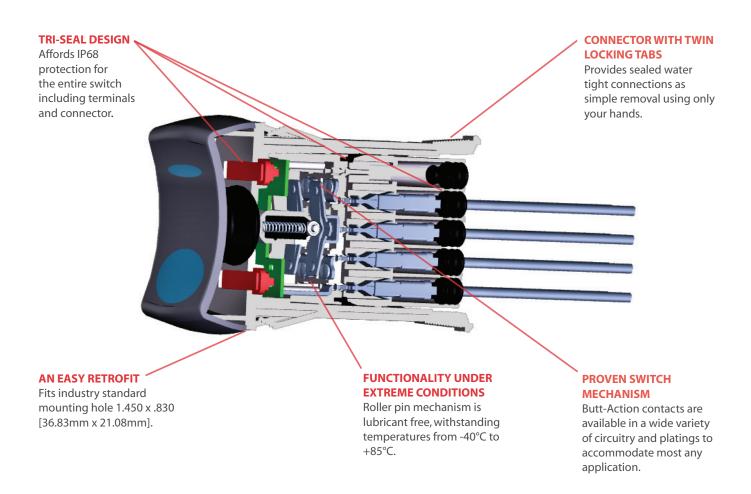

Electrical

Contact Rating .4VA @ 24VDC 10 amps, 3-24VDC

Dielectric Strength 1500 Volts RMS Insulation Resistance 50 Megaohms

Initial Contact Resistance 10 milliohms max. @ 4 VDC

100,000 cycles Life Contacts Silver tin-oxide, 88/12

Terminals Copper with silver or gold plating.

Quick Connect terminations.

Voltage 3-24 VDC

Overcurrent 15A for 50 cycles

Mechanical

Endurance 250,000 cycles minimum

Physical

Actuator

Lighted LED - rated 100.000 hours 1/2 life

(LED is internally ballasted for

voltages to 24 VDC)

Neoprene Seals

Polyester blend rated to 125C with a Base

> UL flammability rating of 94V0. Basic actuator structure molded of

thermoplastic polycarbonate with a hard Nylon 66 thermoplastic surface

overlay.

Lens Polycarbonate rated at 100°C Function 2 & 3 Position Rocker Style Operation Maintained & Momentary PA 6/6 30GF (glass filled) Base

PA 6/6 13GF Actuator PBT 10GF Bracket

PBT 10GF, polarized Connector

Actuator Travel (Angular Displacement)

24° full throw

Environmental

Environmental Corrosion/

IP68, Fully sealed

Chemical Splash Flowing Mixed Gas (FMG)

Class III 3 year accelerated exposure

Operating Temperature

Vibration 1

per ASTM B-827, B-845 -40°C to +85°C, 22 cycles, 300 hours Per Mil-Std 202F, Method 204D Test

Condition A 0.06 DA or 10G's 10-500

Ηъ

Vibration 2 Resonance search 24-50 Hz 0.40 DA

50-2000 ±10 G's peak

Results Horizontal Axis 3-5 G's max.

Random

24 Hz 0.06 PSD-Gsq/Hz

60 Hz 0.50 100 Hz 0.50 200 Hz 0.025 2000 Hz 0.025

Handling/Drop One meter onto concrete floor

Per Mil-Std 202F, Method 101D, Test Salt Spray

Condition A, 48 Hrs.

Dust

Thermal Shock Per Mil-Std 202F, Method 107F, Test

Condition A, -55°C to 85°C. Test criteria - pre and post test contact

resistance

Moisture Resistance/

Humidity


Per Mil-Std 202F, Method 106F, Test Criteria - pre and post test contact

resistance

Mounting Specifications


Panel Thickness Range .032 to .125


For optimum panel fit, the following panel thicknesses are suggested: .032, .062, .093, .125





*Manufacturer reserves the right to change product specification without prior notice


Dimensional Specifications: in. [mm]



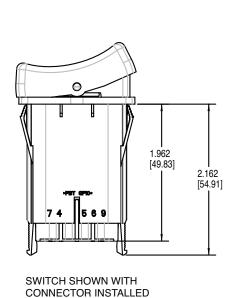


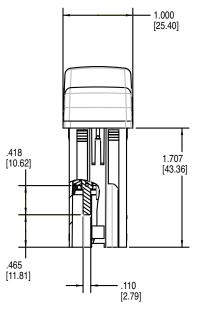

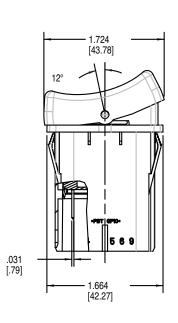




WCH CONNECTOR (190-31214-001)



Notes: WCH connector is intended for use with Tyco/Amp .110 Junior Power Timer, female contacts, and wire seals. For 14-16 awg wire, specify Tyco/Amp P/N 927766-3 For 16-20 awg wire, specify Tyco/Amp P/N 927770-3 Tyco/Amp cable seal P/N 828904-1 (20-18 awg wire) or P/N 828905-1 (16-14 awg wire) is required for each individual wire lead, and Tyco/Amp cable plug, P/N 828922-1, is required to seal each unused connector opening. Consult Tyco/Amp for the cable seal recommended for your specific wire gauge and thickness.



1 SERIES

2 CIRCUIT Terminal Co from bottom 8 terminal 8 7 1 4 2 5 3 6	onnections as viewed		() - momentary SP - single pole - uses terminals 1, 2 & 3. DP - double pole uses terminals 1, 2, 3, 4, 5 & 6. Terminals 7, 8, 9 & 10 for lamp circuit only.		
Position: SP 11 12 13 14 15 16 17 18	DP 21 22 23 24 25 26 27 28 49	1 2 & 3, 6 & 8 ON (ON) ON ON ON ON ON ON ON ON	2 Connected Terminals NONE NONE NONE NONE OFF OFF OFF ON	3 1 & 2, 5 & 6 OFF OFF (OFF) ON (ON) ON (ON) ON)	

3 RATING B 10A 24V D 10A 12V G 10A 6V H 10A 3V
--

4 TERMINATION/BASE STYLE .110 TAB (QC)

5 ILLUMINATION


Lamp	#1:above terminal	ls 1&4 end of switch.; Lamp #2 above (-) symbols apply to LED lamps	ve term	inals 3&6 end of switch.
FUSILI	ve (+) and negativ	Actuator Lens Position	Offic	
	<u>Lamps</u>	Illumination Type	Lamı	o wired to Terminals
0	NONE	marmination Typo		
Ă	# 1	Independent	8+	7-
В	# 1	Down	3+	7-
Ċ	# 2	Up	3+	7-
D	# 1	Down	3+	7-
	& # 2	Down	1+	7-
E	# 1	Up	1+	7-
	& # 2	Up	3+	7-
F	# 1	Independent	8+	7-
	& # 2	Up	3+	6-
G	# 1	Independent	8+	7-
	& # 2	Up	3+	7-
H	# 2	Independent	8+	7-
		e Pole Witches Only:	_	
J	# 1	Down	3+	8-
.,	& # 2	Independent	6+	<u>7</u> -
K	# 1	Independent	8+	7-
0.1.	& # 2	Independent	6+	7-
		e Pole Switches Only:	_	0
L	# 1 # 2	Down	3+ 3+	6- 6-
M N	# Z # 1	Up Down	3+ 3+	6-
IN	# I & # 2	Down	3+ 1+	0- 4-
P	& # ∠ # 1	Up	1+	4-
_ F	# I & # 2	Up	3+	6-
R	# 1	Down	3+	7-
n	# 1 & # 2	Up	6+	7- 7-
S	# 1	Down	6+	, 7-
_	*	Independent	8+	, 7-
U	# 1	Independent	8+	7-
_	% # 2	Independent	10+	9-
V	# 2	Independent	10+	9-
w	# 1	Independent		
	& # 2	Independent	10+	7-
Υ	#1&2	Independent in Series	8+	7-
Ž	#1&2	Independent in Parrallel	8+	7-
		<u> </u>		

6,7 LAMP (SAME CODING FOR BOTH SELECTIONS) Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6 No lamp 0 I FD* superbright					
LLD	Red	Amber	Green	White	
2VDC 6VDC 12VDC 24VDC	A B C D	L M N P	F G H J	4 5 6 8	
* Consult factory for "daylight bright", blue/green and white LED options. Typical current draw for LED is 20ma.					

9 Δ	CTUATOR ^{1,3}		
3	Black with Laser Etch		
Δ	Black		

8 BRACKET COLOR¹ Black

	10 LENS - ABOVE LAMP #1 TERMINALS ^{1,4} 11 LENS - ABOVE LAMP #2 TERMINALS ^{3,6}							
	Lens color for LEDs must be clear, white, or match color of LED. 0 - No Actuator Z - No Lens							
			Amber		Red	Blue		
	1	•	В	G	M	T Large Transparent		
		7	Č	H	N	U Large Translucent		
	3	-	Ď	J	P	V Bar Transparent		
	-	9	E	K	R	W Bar Translucent		
	5	Α	-	-	-	 Laser Etch background color 		
ı						-		

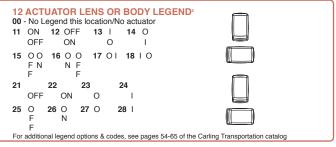



14 ACTUATOR LENS LEGEND²

00 No legend this location/no actuator (used with codes 11-18 in selection 12)
Selection 14 required when switch requires two legends. If the two legends consist of
one lens & one body legend, lens legend must be specified in selection 12; body legend
specified in selection 14. For legend options & codes, see pages 54-65 of the Carling
Transportation catalog.

Notes:

- Custom colors are available. Consult factory.
- 1 White imprinting is standard on black actuators; Black imprinting is standard on white, red & gray actuators; Custom colors are available, consult factory.

 Locking rocker version is also available, consult factory for details.

* Intentionally left blank

Worldwide Headquarters

Carling Technologies, Inc. 60 Johnson Avenue • Plainville, CT 06062-1177 Phone: (860) 793-9281 • Fax: (860) 793-9231 Email: sales@carlingtech.com • www.carlingtech.com

East Region Sales Office, CT • ersm@carlingtech.com Midwest Region Sales Office, IL • mrsm@carlingtech.com West Region Sales Office, CA • wrsm@carlingtech.com

Asia-Pacific Headquarters

Carling Technologies, Asia-Pacific Ltd., Kowloon, Hong Kong Int + 852-2737-2277 • Fax: Int + 852-2736-9332 Email: sales@carlingtech.com.hk

Shenzhen, China • shenzhen@carlingtech.com Shanghai, China • shanghai@carlingtech.com Pune, India • india@carlingtech.com Kaohsiung, Taiwan • taiwan@carlingtech.com Yokohama, Japan • japan@carlingtech.com

Europe/Middle East/Africa Headquarters

Carling Technologies, Ltd.,
Devon, England 06062-1177
Int + 44 1392-364422 • Fax: Int + 44 1392-364477
Email: Itd.sales@carlingtech.com

GmbH, Germany • gmbh@carlingtech.com SAS, France • sas@carlingtech.com

REV_SW_W_0412

